

Installation

Wall Mounted



Trimless Recessed



Edged Recessed



Pendant




Surface Mounted




Light source



Flexible strip




Rigid module



Dimming and toning rigid module

Integrated Wiring


Aesthetic appearance

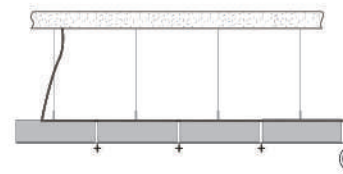

Quick connector



Convenient Connection

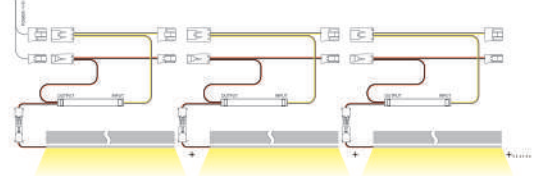

Profile



LS series



LR series

Diffuser




General diffuser
PC material/2.5M



Black diffuser
PMMA material/2.5M



Aluminium blind diffuser
2.5M



Flexible diffuser
PC material/50M

Power supply



0-10V dimming



DALI-dimming



Non-dimming

Vertical splitting bar



7-type
(90°)



7-type
(120°)



7-type
(60°)

Profile interconnection



EX-23



EX-17

Luminaire interconnection



EX-24

Interconnection

Horizontal splicing bar



X-type
(90°)



X-type
(60°+120°)



Y-type
(120°)



L-type
(90°)



L-type
(60°)



L-type
(120°)



T-type
(60°+120°)



T-type
(90°)



180°
Extender

Customized corner



L90



L90N



L90W



T90



X90

LUCENT
LED TECHNOLOGIES